


Uninsulated flexible duct

FLD



Dimensions

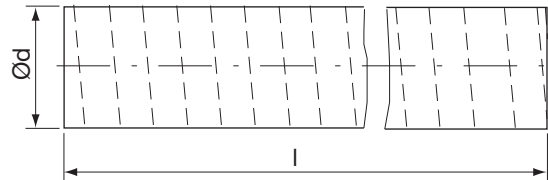

Description

Multiple layer product made up of aluminium/PET laminate formed into a flexible duct supported by a bronze coated wire helix.

Classifications

M1 - CSTB

Technical data

Duct materials	Aluminium/PET laminate Fire retardant adhesive Bronze coated bead wire
Temperature range	-30 to +140°C
Maximum air velocity	30 m/s
Packing	Individual box

Ød nom	O πd m	A $\pi d^2/4$ m ²	l mm	Max. pressure Pa
80	0,251	0,005	10000	+3000
100	0,320	0,008	10000	+3000
125	0,399	0,013	10000	+3000
150	0,478	0,018	10000	+3000
160	0,509	0,021	10000	+3000
180	0,565	0,025	10000	+3000
200	0,638	0,032	10000	+3000
224	0,707	0,040	10000	+3000
250	0,798	0,051	10000	+3000
315	0,990	0,078	10000	+3000
400	1,28	0,129	10000	+3000

Ordering example

Product	FLD	162	10000	AP
Dimension Ød				
Length l				
Material				

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12**
- 13
- 14
- 15
- 16
- 17
- 18