



# Uninsulated flexible reinforced PVC duct

KF

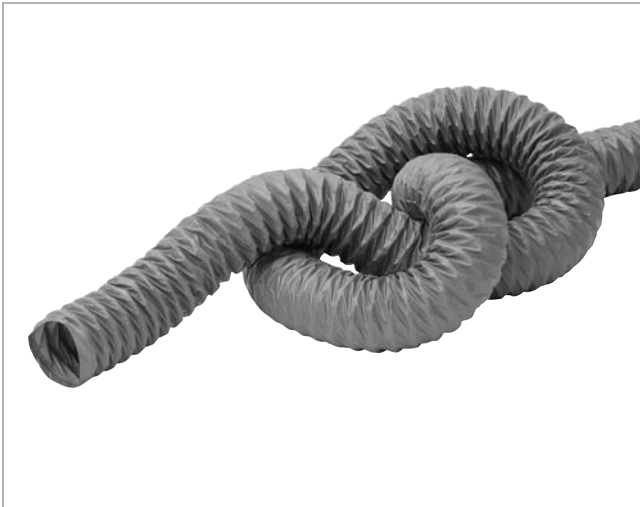

## Dimensions

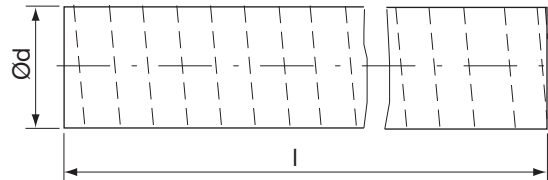

### Description

Reinforced PVC encapsulating a bronze coated wire helix.

### Classifications

Reaction to fire class E acc. to EN 13501-1

### Technical data

Duct materials .....	Glass fiber reinforcing coated with fire retardant PVC
Temperature range .....	-30 to +80 °C
Maximum air velocity .....	30 m/s
Packing .....	Individual box

Ød nom	O $\pi d$ m	A $\pi d^2/4$ m <sup>2</sup>	l mm	Max. pressure Pa
80	0,251	0,005	6000	+3000
102	0,320	0,008	6000	+3000
127	0,399	0,013	6000	+3000
152	0,478	0,018	6000	+3000
162	0,509	0,021	6000	+3000
203	0,638	0,032	6000	+3000
254	0,798	0,051	6000	+3000
315	0,990	0,078	6000	+3000
406	1,275	0,129	6000	+3000

### Ordering example

Product	KF	162	6000	PVC
Dimension Ød				
Length l				
Material				

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18