


Duct

LKR



Dimensions

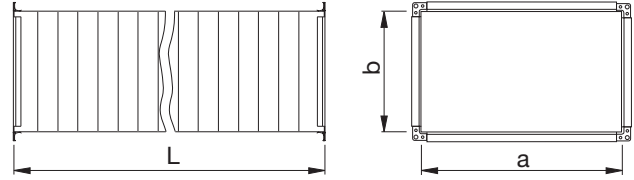

Description

Straight duct, stiffened with transverse trapezoid corrugations, which reduces the risk of noise generation. Larger dimensions have stiffening profiles and/or internal rods. Installation height of these profiles is 23 mm.

Ducts are normally supplied with a strong joining profile RJFP 20 or RJFP 30 at each end, but can also be supplied as a flexible piece, where the joining profile on one end is not fixed. Also available with an end cover fixed by joining profiles.

Ordering example

	LKR	500	300	1500	1
Product					
Largest side	a				
Smallest side	b				
Length	L				
RJFP-joint at both ends		1			
RJFP-joint at one end					
Loose joint included.		2			
RJFP-joint at one end					
End cover on joining profiles at other end.			3		
End cover on joining profiles at both ends.				4	
RJFP-joint at one end					
No loose joint included.			5		

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18